

PANIC EXIT DEVICE SERIES 59600 FOR PANIC FUNCTION LOCKS



An **IR** Ingersoll Rand Company



MAIN FEATURES

EASY TO INSTALL

- CISA panic exit devices are easy and quick to install, on wooden, steel or aluminium doors in combination with the panic function mortice locks series 43000

RELIABILITY

- CISA panic exit devices are produced with high quality materials and reliable operating mechanisms to guarantee efficiency and durability.

CERTIFICATION AND CE MARKING

- The materials and technical solutions adopted allow the highest standards to be respected, leading CISA to obtain markings and certifications such as:
 - CE marking according to the EEC DIRECTIVE 89/106 released by AENOR;
 - Voluntary product certification released by a third party ICIM as provided for by the UNI EN 1125 standards.
- CE marking certifies the panic exit device in combination with CISA locks, as indicated in the certificates and in the fitting instructions supplied with the devices.

Technical features

- Nylon or painted aluminium/aluminium alloy casing.
- Painted aluminium or stainless steel bar, that can be shortened (to be ordered separately).
- Internal components in galvanized steel, also suitable for fire doors.

Standard operation

- From inside: pushing the bar
- From outside: with the key and/or the handle

Finishes


- Standard:
 - BLACK casing
- On request (for the series 59605, 59615):
 - painted red (fin. 41)
 - painted yellow (fin. 42)
 - painted green (fin. 43)
 - painted white (fin. 45)
 - painted grey (fin. 97)

Hand



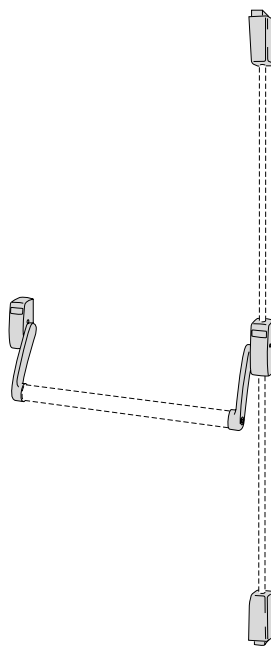
0 = non-handed

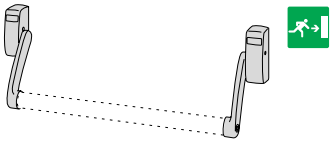
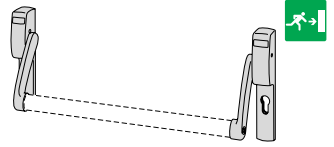


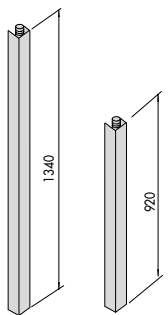
Supply as standard

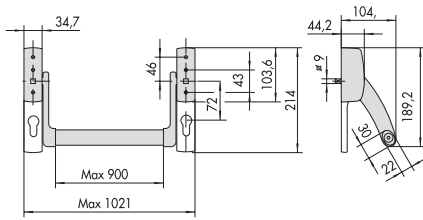
- Fixing screws
- In stallation and maintenance instruction sheet
- ICIM and CE certificates



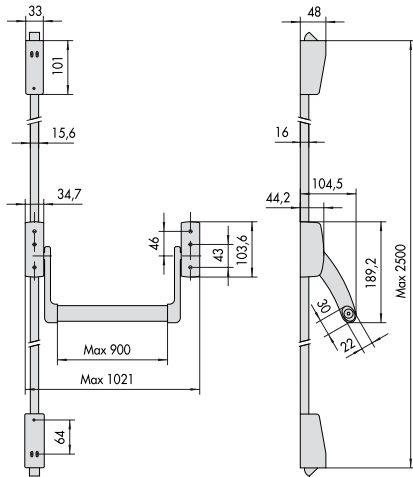
MA11
07-05

Type	Description	For locks series	Square spindle	Distance	Kg Unit w.	Pieces	ITEM				
							Type	Dim.	Hand	Fin. Pers. Spec.	
	<ul style="list-style-type: none"> • Black painted aluminium casing 	43100, 43600	9	-	2,700	1	1	59605	00 0		
	<ul style="list-style-type: none"> • Black nylon casing 	43100, 43600	9	-	2,500	1	1	59606	00 0		
	<ul style="list-style-type: none"> • Black painted aluminium casing 	43100	9	72	2,750	1	1	59615	00 0		
	<ul style="list-style-type: none"> • Black painted aluminium casing 	43600	9	92	2,750	1	1	59615	12 0		
	<ul style="list-style-type: none"> • Black nylon casing • Pre-arranged for single cylinder 	43100, 43600	9	92/72	2,500	1	1	59616	00 0		
	<ul style="list-style-type: none"> • Black nylon casing • Pre-arranged for double cylinder 	43100	9	72	2,500	1	1	59616	10 0		
	<ul style="list-style-type: none"> • Black nylon casing • Pre-arranged for double cylinder 	43600	9	92	2,500	1	1	59616	12 0		
	<ul style="list-style-type: none"> • Black painted aluminium casing • FOR THE SECONDARY LEAF OF A DOUBLE DOOR, where it is not possible to assemble the safety lock • On the main door it is possible to install the panic exit devices series 59615 together with the locks series 43110 and 43114 • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Striker item 1.07072.11.0 - Floor striker item 1.07073.11.0 • TO BE ORDERED SEPARATELY: <ul style="list-style-type: none"> - Pair of extended bolts item 1.07081.12.0 	-	-	4,800	1	1	59646	00 0			
	<ul style="list-style-type: none"> • Black nylon cover • FOR THE SECONDARY LEAF OF A DOUBLE DOOR, where it is not possible to assemble the safety lock • On the main door it is possible to install the panic exit devices series 59615 together with the locks series 43110 and 43114 • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Striker item 1.07072.11.0 - Floor striker item 1.07073.11.0 • TO BE ORDERED SEPARATELY: <ul style="list-style-type: none"> - Pair of extended bolts item 1.07081.12.0 	-	-	4,800	1	1	59647	00 0			

Type	Description	For locks series	Square spindle	Distance	Kg Unit w.	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Black painted aluminium casing	43200	8	-	2,700	1	1	59605	06	0	
	• Black nylon casing	43200	8	-	2,500	1	1	59606	06	0	
	• Black painted aluminium casing	52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864,	8	85	2,750	1	1	59615	16	0	
	• Black painted aluminium casing	43200	8	92	2,750	1	1	59615	17	0	
	• Black nylon casing • Pre-arranged for double cylinder	52760, 52761, 52840, 52842, 52844, 52860, 52862, 52864,	8	85	2,500	1	1	59616	16	0	
	• Carter in nylon nero • Pre-arranged for double cylinder	43200	8	92	2,500	1	1	59616	17	0	
	• Oval shaped bar in red painted steel	L = 900	0,800	1	1	07007	13	0			
	• Available finishes:	L = 1200	0,800	1	1	07007	14	0			
	- painted yellow (fin. 42) - painted green (fin. 43) - painted black (fin. 44) - painted white (fin. 45) - painted grey (fin. 97)	L = 1500	0,900	1	1	07007	15	0			
	• Oval shaped stainless steel bar	L = 900	0,800	1	1	07007	60	0			
		L = 1200	1,100	1	1	07007	61	0			
		L = 1500	1,450	1	1	07007	62	0			
	• Pair of extended bolts, in black painted steel	59646, 59647			1,130	1	1	07081	12	0	



59605, 59606, 59615, 59616,



59646, 59647