

TOUCH-BAR PANIC EXIT DEVICES



SBLOCK



MAIN FEATURES

ACCURATE DESIGN

- The balance of size, style and weight, result of accurate design work, makes "SBLOCK" suitable for any interior.

EASY TO INSTALL

- Special design features make "SBLOCK" easy and quick to install on wooden, steel or aluminium doors.

MODULARITY

- "SBLOCK" can be used alone or together with upper/lower additional locking devices and outside operation units, for 1 or 2 leaf doors, standard doors and double-swing doors. The same upper/lower additional locking points and outside operation units can be combined with NewEuropa series panic exit devices.

RELIABILITY

- "SBLOCK" is manufactured with high quality materials and includes simple mechanisms so as to guarantee long-lasting performance reliability.

CERTIFICATION AND CE BRAND **CE**

- CISA materials and technical solutions allow to respect the higher standard requirements of the Norms, giving the possibility to obtain brands and certifications such as:
 - CE brand issued by AENOR according to Directive 89/106/CEE. Certificate n° 0099CPD/A44/003-products for use on standard doors
Certificate n° 0099CPD/A44/004-products for use on fire rated doors
 - Voluntary product certification issued by ICIM: the issue of the Certificate by a third Certification Organism is foreseen by UNI EN 1125 Norm.
- All Cisa "SBLOCK" Serie panic devices are CE branded since June 2002 and are certified by ICIM since March 2002.

Technical features

- Painted aluminium/aluminium alloy casing.
- Painted aluminium bar, that can be shortened up 300 mm, on all models.
- Latchbolts and deadbolts in chromium-plated aluminium alloy.
- Self-locking side and upper/lower latchbolts

Operation

- From inside: by pushing the bar.
- From outside: with key and/or handle

Finishes

- Standard: BLACK casing, RED bar

- On request
 - RED casing, BLACK bar (fin. 41)
 - YELLOW casing, BLACK bar (fin. 42)
 - GREEN casing, BLACK bar (fin. 43)
 - BLACK casing, BLACK bar (fin. 44)
 - WHITE casing, BLACK bar (fin. 45)
 - GREY casing, GREY bar (fin. 97)
- Available bar colour finishes
 - Lacquered anodized aluminium (pers. AL)
 - Lacquered anodized bronze (pers. BR)
 - Brass plated (pers. OT)
 - Painted green (pers. VE)
 - Painted white (pers. BI)

Hand


0 = Non-handed

Supplied as standard





- Strikers
- Fixing screws
- Installation and maintenance instruction sheet
- ICIM and CE Certificates





On request

- Outside operation units
- Additional locking points
- Version with microswitch (spec. LA)
- Version with hold open device (spec. FG)
- Fire version with steel latchbolts (spec. FR)



MA08
07-03

Type	Description	L	Unit weight Kg	Pieces	ITEM					
					Type	Dim.	Hand	Fin.	Pers. Spec.	
	<ul style="list-style-type: none"> • Self-locking lateral latchbolt • SUPPLIED AS STANDARD - Strikers item. 1.07072.20.0 and 1.07072.21.0 • ON REQUEST: - Outside operation devices item. 1.07077.28.0 and 1.07077.29.0 	1200	3,100	1	1	59800	10	0		
		840	3,800	1	1	59800	11	0		
	<ul style="list-style-type: none"> • MODULAR VERSION • Self-locking latchbolt which can be deactivate • SUPPLIED AS STANDARD: - Striker item 1.07072.20.0 e 1.07072.21.0 • Can be used with: - Pair of top/bottom latchbolts item 1.07063.60.0 - Pair of lateral latchbolts item 1.07063.50.0 - Pair of top/lateral latchbolts item 1.07063.65.1/2 - Pair of top/bottom dedbolts item 1.07063.70.0 • ON REQUEST: - Outside operation device item 1.07077.28.0 	1300	3,100	1	1	59810	09	0		
		1200	3,100	1	1	59810	11	0		
		840	3,800	1	1	59810	12	0		
	<ul style="list-style-type: none"> • MODULAR VERSION • Must be used with: - Pair of top/bottom latchbolts item 1.07063.60.0 - Pair of lateral latchbolts item 1.07063.50.0 - Pair of top/lateral latchbolts item 1.07063.65.1/2 - Pair of top/bottom dedbolts item 1.07063.70.0 • ON REQUEST: - Outside operation device item 1.07077.28.0 	1200	2,500	1	1	59815	10	0		
		840	2,500	1	1	59815	11	0		
	<ul style="list-style-type: none"> • Black painted aluminium alloy plate with handle and cylinder item 1.02649.10.0 				2,500	1	1	07077	28	0
	<ul style="list-style-type: none"> • Black painted aluminium alloy plate with cylinder item 1.02649.11.0 				2,500	1	1	07077	29	0

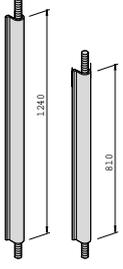
Type	Description	Per series/item	Kg		ITEM					
			Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers.	Spec.
	<ul style="list-style-type: none"> • Pair of latchbolts for lateral locking points • SUPPLIED AS STANDARD - Strikers item 1.07072.20.0 and 1.07072.21.0 	59810, 59815,	1,000	1	1	07063	50	0		
	<ul style="list-style-type: none"> • Pair of dead-locking latchbolts for top/bottom locking points • SUPPLIED AS STANDARD - Upper striker item 1.07072.20.0 and 1.07072.21.0 - Floor striker item 1.07072.27.0 	59810, 59815,	1,000	1	1	07063	60	0		
	<ul style="list-style-type: none"> • Pair of latchbolts for upper dead-locking and bottom lateral locking points • SUPPLIED AS STANDARD - Strikers item 1.07072.20.0 and 1.07072.21.0 	59810, 59815,	1,000	1	1	07063	65	1		
			1,000	1	1	07063	65	2		
	<ul style="list-style-type: none"> • Pair of latchbolts for top/bottom locking points for swinging doors • SUPPLIED AS STANDARD - Upper striker item 1.07272.25.0 and 1.07072.26.0 - Floor striker item 1.07072.25.0 	59810, 59815,	1,000	1	1	07063	70	0		
	<ul style="list-style-type: none"> • Additional lateral latchbolt • SUPPLIED AS STANDARD - Strikers item 1.07072.20.0 and 1.07072.21.0 	59810, 59815,	0,300	1	1	07063	25	1		
			0,300	1	1	07063	25	2		
	<ul style="list-style-type: none"> • Black painted extended bolts • To be used with latchbolts item 1.07063.50/60/65/70 	59810, 59815,	1,130	1	1	07081	15	0		
	<ul style="list-style-type: none"> • Top extended bolt set 	07063	0,500	1	1	07064	50	0		

Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.




• Microswitch to be used with panic exit devices SBLOCK serie

0,020 1 1 06195 05 0




• Hold open devices for panic exit devices SBLOCK series

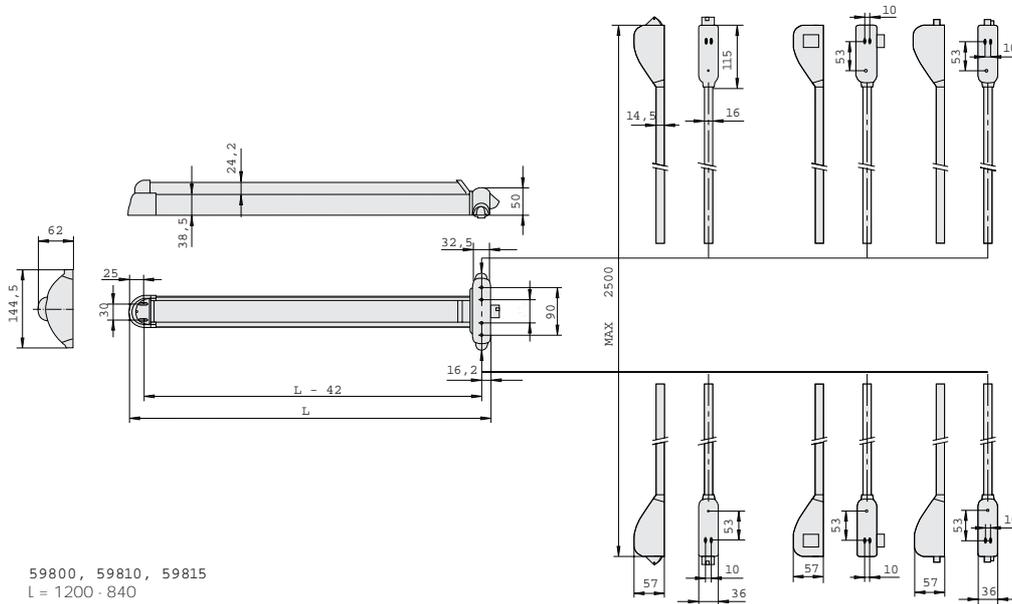0,080 1 1 07065 50 0



59800, 59810, 59815
L = 1200 - 840

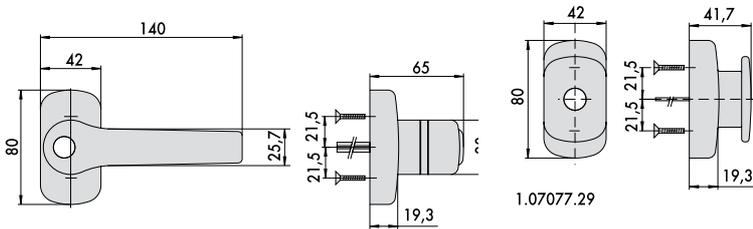

1.07077.28